John Sexton Survey Sections 27 & 34 T. 8. R. 1. E

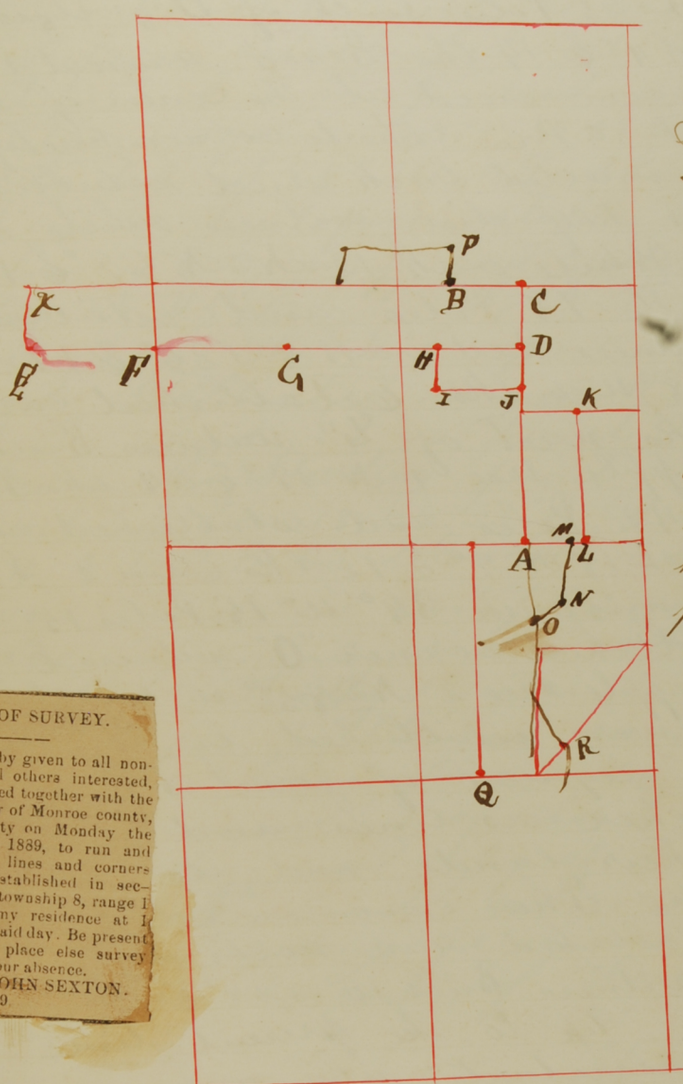

May 6th To 10th 1889 made the following Survey of Sections 27 & 34 T.8. R 1 E

Commenced at S.E of Sec 27 Ran west 317. Poles 24 lks To S W section corner ran 5 lks South of corner corrected back and Set corner "A" at half dist between S ½ m p & S.E corner witness Black walnut 7 S 32° E 6 4 lks Black walnut 2 S 87° W 86 lks Ran Thence North 160 rods and drove Stake Then commenced at E ½ m p ran west 122. Poles 22 lks To corner heretofore established 96 Poles 12½ lks east of center

NOTICE OF SURVEY.

Notice is hereby given to all non-residents and all others interested, that I will proceed together with the County Surveyor of Monroe county, Ind., or his deputy on Monday the 6th day of May, 1889, to run and establish all the lines and corners necessary to be established in sections 27 and 34, township 8, range 1 East. Meet at my residence at 1 o'clock p. m. on said day. Be present at said time and place else survey will proceed in your absence.

JOHN SEXTON.

April 13th, 1889.

Reestablished this corner "B" by planting Stone to old witnesses Established corner "C" at half distance between E ½ m p and center witness Elm 7 S 75° E 19 lks Hickory 4 N 10° W 3¾ lks established corner "D" 40 Poles South of "C" witness — 15 N 18° E 8 lks Hickory 15 S 69° W 15 lks ran Thence west one mile to a point 40 Poles South of "X" in section 28 established corner "E" at this point witness Beech 24 S 75 W 15 lks Beech 7 N 61° E 25 lks Established corner "F" 40 South of W ½ m p wit Buck 3 S 69° W 15 lks Beech 18 S 85° E 25 lks Established corner "G" ¼ mile East of above corner witness Ash 2 N 60° W 2¾ lks Ash 2 N 38° E 2¾ lks Established corner "H" 64 poles west of "D" witness Stone set 14½ lks east Established corner "I" 25 Poles South of "H" witness Stone Set 19 lks east of corner